

REV	更改内容 MODIFICATION	日期 DATE	制图 DRAW	审核 APPROVE
A	版面发行	2012/10/29	JDL	Oscar

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 50 MILLIOHMS MAX.
- INSULATION RESISTANCE: 500 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 50Hz, 1MIN.

MECHANICAL:


- HOUSING MATERIAL : NYLON+30%G.F U194V-0.
- CONTACT MATERIAL : PHOSPHOR BRONZE $\phi 0.46$ mm
- PLATING : GOLD PLATING OVER NICKEL.
- SHIELD: COPPER ALLOY(OR STEEL ALLOY) 0.20mm THICKNESS PLATING NI.
- LED:OPTION
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C.
 - OPERATION: 0°C TO +70°C.
 - WAVE SOLDERING TEMPERATURE: 255~265° (5~10SECONDS).
 - ROHS COMPLIANT
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

PART NUMBER: 59A-S1108B-L1XX

GOLD PLATING "U"
1-"U" 2-"2U" 3-"3U" 4-"6U"
PLASTIC MATERIAL:COLOR:Black/Yellow/Gray
2-P446 Black

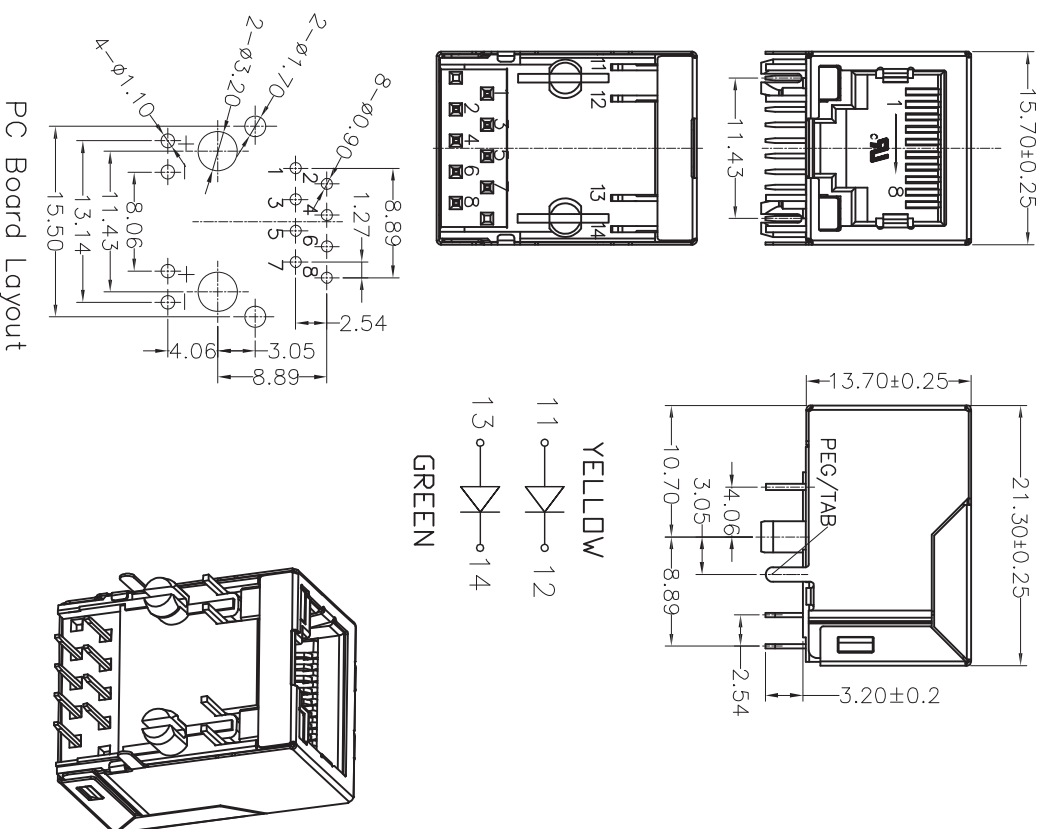

PC Board Layout

: Inspection Item		: Cp/Cpk and SPC Control Item	
DIMENSION IN mm [Inch]		TOLERANCE UNLESS OTHERWISE SPECIFIED	
.X±0.20 X*±1*		.X±0.15 .X*±0.5*	
.XXXX±0.075		.XXXX±0.075	
批准 APPROVE	检查 CHECK	制图 DRAW	审核 SCALE
Shenzhen Chuangqin Technology Co., Ltd.		Oscar	
深圳市创勤科技有限公司		1:1	
图号 FILE NO.	图号 DWG NO.	比例 SCALE	张数 REV
	59A-S1108B-L1	1:1	1 / 1
59A 1X1 8P8C LED PCB JACK WITH SHIELDED SIDE ENTRY ROUND PIN		图例 SIZE	数量 REV
		A3	A