
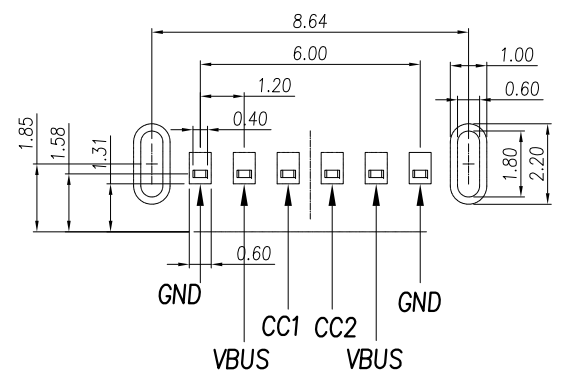
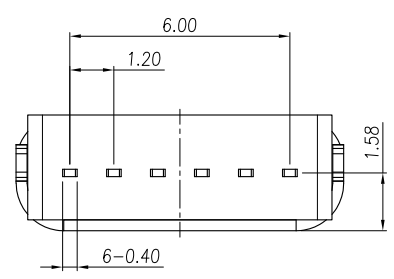
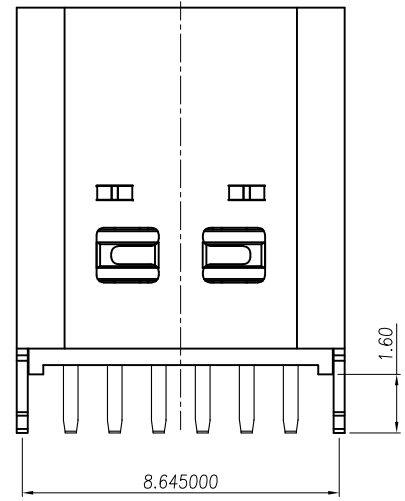
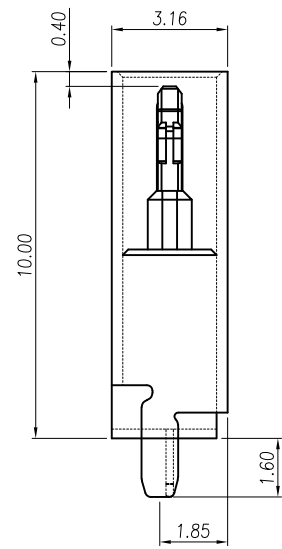
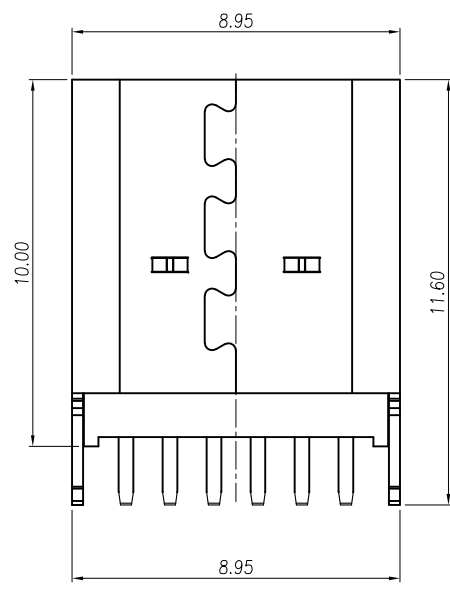


Rev No.	Description of Revision	Date	Name	Approved	ECN No.
△					

NOTES:

- MATERIAL:
 - MOLDING: LCP UL94 V-0
 - CONTACT: COPPER ALLOY.
 - GOLD PLATED Min ON CONTACT AREA, 100u"
 - Min TIN (LEAD FREE) ON SOLDER AREA,
 - SHELL: SUS201-H, T=0.30±0.03mm
 - 50u" NICKEL PLATING OVER ALL.
- MECHANICAL:
 - INSERTION: 5~20N.
 - EXTRACTION: 8~20N AFTER TEST.
 - DURABILITY: 5000 CYCLES
- ELECTRICAL:
 - CURRENT: 3A FOR VBUS;
 - 1.25A FOR GND PIN.
 - 0.25A FOR OTHER.
 - VOLTAGE: 20 V MAX
 - WITHSTANDING VOLTAGE: 100V AC R.M.S.
 - CONTACT RESISTANCE: 40mΩ MAX.
 - INSULATION RESISTANCE: 100MΩ MIN.
- ENVIRONMENTAL
 - TEMPERATURE RANGE -25°C ~ +85°C
- 尺寸标注事项:
 - 图示有标示"△"者为首样全检, 重点管控尺寸.
- 产品符合RoHS标准.

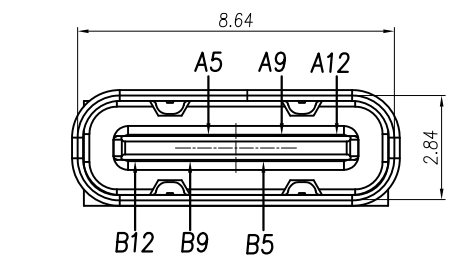

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

B12	GND
B9	VBUS
B5	CC2
A5	CC1
A9	VBUS
A12	GND
PIN	SIGNAL NAME

UNLESS OTHERWISE SPECIFIED TOLERANCES		深圳市创勤电子有限公司 SHENZHEN CHUANGQIN ELECTRONICS CO., LTD.			
DECIMALS:	ANGLES	TITLE: TYPE-C 6PIN 立插 H=10.0mm			
X. ±0.20	X°. ±2°	Drwn. LINYUN	PART NO. CQ087-TFLC0610361		
X.X ±0.10	X.X° ±1°	Checked. LIJY	SCALE: 1:5	UNIT: mm	PROJ.
X.XX ±0.05	X.XX° ±0.5°	Approved. ZHANG	SIZE: A4	SHEET: 2 OF 2	REV. A
X.XXX ±0.03					