

NOTES:

MATERIAL:

1. HOUSING MATERIAL :GLASS FILLED POLYESTER(UL94V-0).
2. CONTACT MATERIAL :PHOSPHOR BRONZE $\phi 0.46\text{mm}$ (C5100).
3. PLATING :GOLD PLATING OVER NICKEL.

ELECTRICAL:

1. VOLTAGE RATING :125 VAC RMS.
2. CURRENT RATING :1.5 AMP.
3. CONTACT RESISTANCE :50 MILLIOHMS MAX.
4. INSULATION RESISTANCE :500 MEGOHMS MIN @ 500V DC.
5. DIELECTRIC WITHSTANDING RESISTANCE :1000V AC RMS 50HZ. 1MIN.

MECHANICAL:

1. DURRABILITY :750 CYCLES MIN.
2. PCB RETENTION PRE-SOLDER :1 LB MIN.

ENVIRONMENTAL:





1. STORAGE : -40°C TO $+85^{\circ}\text{C}$.
2. OPERATION : 0°C TO 70°C .

MATES WITH MODULAR PLUG CONFORMING TO

FCC PART 68,SUBPART F.

△ PART NUMBER:

8001-0162122XX2X

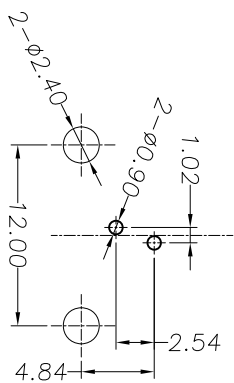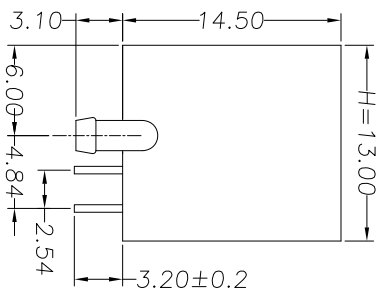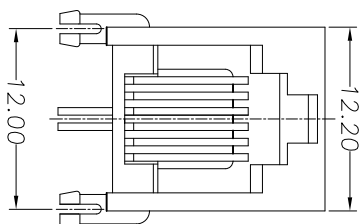

PC Board Layout

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD
△		原始版本	PEILEI 05.08.15	
△		增加料号, 更改图号	xushiyong 07.02.09	

DETACHED LISTS			
MM	(INCH)	公差	公差
0 ±0.20		±	±
.00 ±0.15		±	±
.000 ±0.075		±	±

数量:	表面处理:	比例: 1:1
材料:	设计 peilei	日期 05.08.15
审核 GAMBO	日期 05.08.15	日期 05.08.15
北流 xushiyong	日期 05.08.15	

深圳市创勤科技有限公司	Shenzhen Chuangqin Technology Co., Ltd.
系列名称	8001-6P2C
图号	ED-HX-8001-6P-002
编号:	不按比例
版本	A3 B