

REV.	MODIFICATION	ECN No.	NAME	DATE
A0	新版发行		ZHANG	2017-02-24

NOTES:

- MATERIAL:
 - MOLDING: LCP UL94 V-0
 - CONTACT: COPPER ALLOY.
 - GOLD PLATED Min ON CONTACT AREA, 100u"
 - Min TIN (LEAD FREE) ON SOLDER AREA,
 - SHELL: SUS304-H,T=0.30±0.03mm
 - 50u" NICKEL PLATING OVER ALL.
- MECHANICAL:
 - INSERTION: 5~20N.
 - EXTRACTION: 8~20N AFTER TEST.
 - DURABILITY: 10000 CYCLES
- ELECTRICAL:
 - CURRENT: 3A FOR VBUS;
 - 1.25A FOR GND PIN.
 - 0.25A FOR OTHER.**
 - VOLTAGE: 20 V MAX
 - WITHSTANDING VOLTAGE: 100V AC R.M.S.
 - CONTACT RESISTANCE: 40mΩ MAX.
 - INSULATION RESISTANCE: 100MΩ MIN.
- ENVIRONMENTAL
 - TEMPERATURE RANGE -25°C ~ +85°C
- 尺寸标注事项:
 - 图示有标示"⊗"为首样全检, 重点管控尺寸.
- 产品符合RoHS标准.

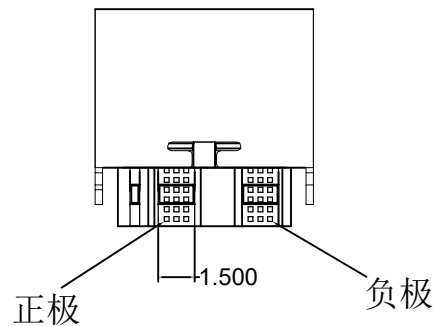

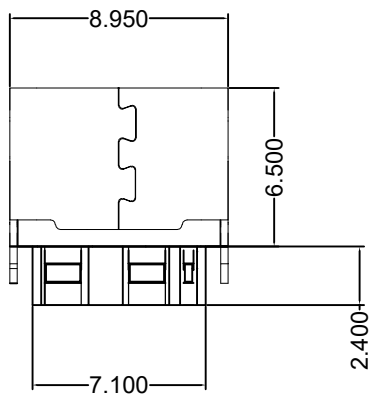


Table:

成品料号	零件名称	零件料号	材料 / 电镀
TX	端子	TX	SUS 304 RH NO PLATING
	塑胶材料	TX	SUS 301 RH Sn 80~200u"
	外壳	TX	SUS 301 RH 电镀切料带后.

深圳市创勤科技有限公司
SHENZHEN CHUANGQIN TECHNOLOGY CO., LTD.

.X: ±0.35	.X*: ±1.5*	INTENDED USE: CONNECTOR	TITLE: TYPE-C 2P 焊线式	
.XX: ±0.25	.XX*: ±1.0*		PART NO.:	SEE TABLE
.XXX: ±0.20	.XXX*: ±0.5*	APPD.: ZHANG	DWG. NO.:	CQ016-TFHX0206531
MAT'L.: SEE NOTES	⊗	CHKD.: LI JY	SCALE: 1:1	PAGE: 1/1
FINISH:		DR.: LIN YUN	UNIT: mm	REV.: A0