

SPECIFICATION

1. ELECTRICAL CHARACTERISTICS:
 - 1-1. VOLTAGE&CURRENT RATING:DC 30V MAX&1A
 - 1-2. CONTACT RESISTANCE: 40mΩ MAX INITAL.
 - 1-3. INSULATION RESISTANCE: 1000MΩ MIN FOR VOLTAGE 500VDC.
 - 1-4. DIELECTRIC WITHSTAND: 500V AC for 1 MINUTE
 - 1-5. OPERATING TEMPERATURE: -30°C~+85°C
2. MECHANICAL CHARACTERISTICS:
 - 2-1. LIFE TEST :500 CYCLES



Item	Title	Material	Dispose	Remark
1	Terminal	Copper Alloy	Contact Area: See P/N Solder Area: Au G/F or matte Tin of the surface	T=0.20
2	Stator	Steel	Plating Tin	T=0.30
3	Housing	LCP+30%GF	UL 94V-0	BLACK

UNITS	mm	NAME(INTENDED USE)	深圳市创勤电子有限公司 SHENZHEN CHUANGQIN ELECTRONICS CO.,LTD.			
MAT'L	NONE	PART NO.(INTENDED USE)				TITLE: CQ110-SD0051125
		APPD:	ZHANG	DWG NO.:		
		CHKD:	LIJY			
		DR:	LINYUN			
				SCALE	SHEET	REV.
				1:1	1/2	A

X.± 0.25	X°± 1°	FINISH	NONE
.X± 0.15	.X°± 0.2°	Q'TY	NONE
.XX± 0.08	.XX°± 0.05°		
.XXX± 0.05	.XXX°± 0.01°		

ITEM	W	A0	B0	K0	K1	P	F	E	D	P0	P2	T	13"	
DIM	44.0	13.20	29.90	4.50	0.00	20.0	20.20	1.75	1.50	4.00	2.00	0.40	长度/盘	元件/盘
TOLE	+0.30 -0.30	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.00	+0.10 -0.10	+0.15 -0.15	+0.05 -0.05	14.0M	700pcs

REV. ECN.

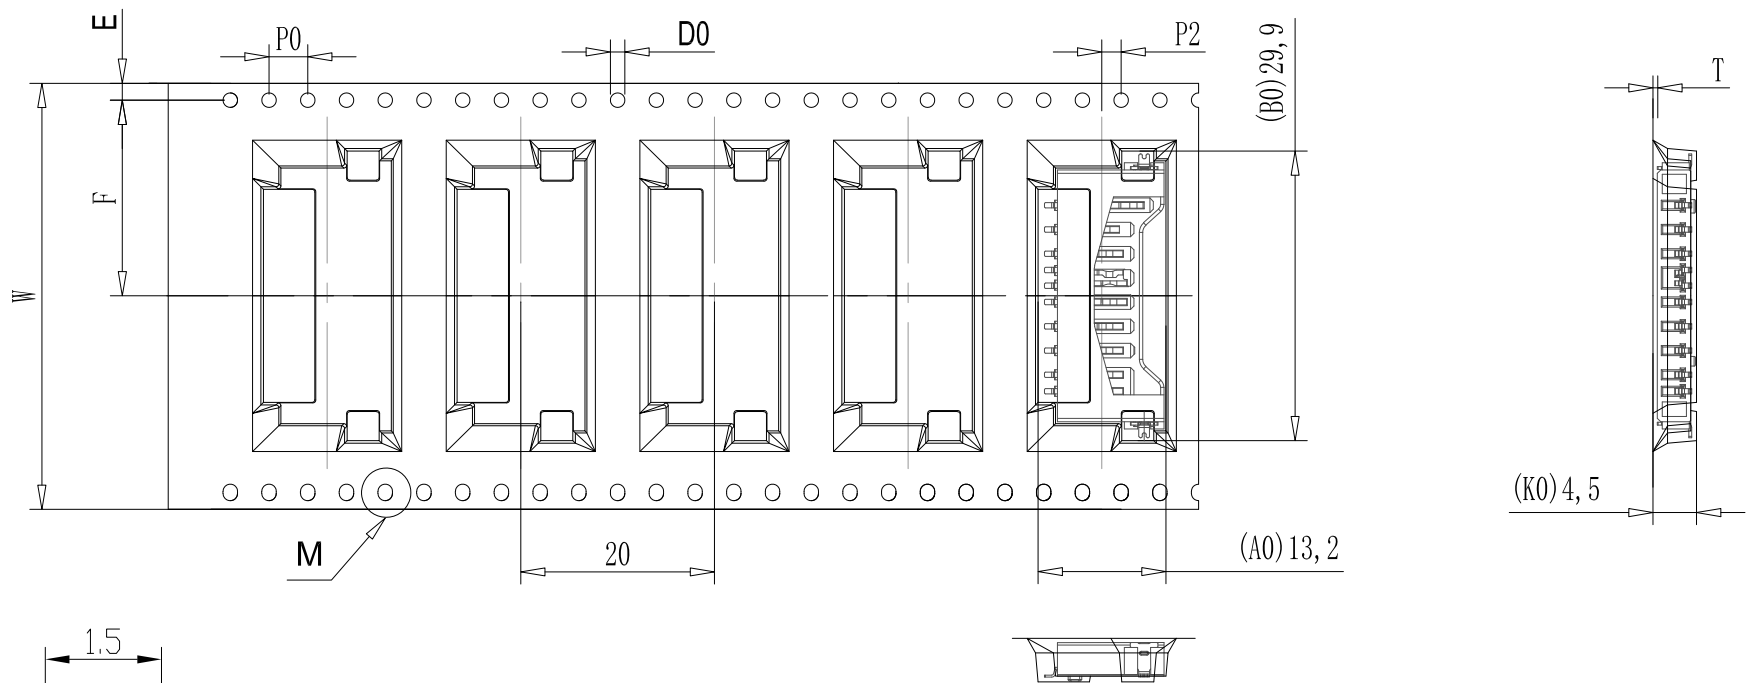

M部祥图

UNITS mm		NAME(INTENDED USE)	深圳市创勤电子有限公司 SHENZHEN CHUANGQIN ELECTRONICS CO.,LTD.	
MAT'L NONE		PART NO.(INTENDED USE)	TITLE: CQ110-SD0051125	
X.± 0.25	X.° ± 1°	APPD: ZHANG	DWG NO.:	
.X± 0.15	.X° ± 0.2°	CHKD: LIJY		
.XX± 0.08	.XX° ± 0.05°	DR: LINYUN		
.XXX± 0.05	.XXX° ± 0.01°		SCALE 1:1	SHEET 2/2
			REV. A	