
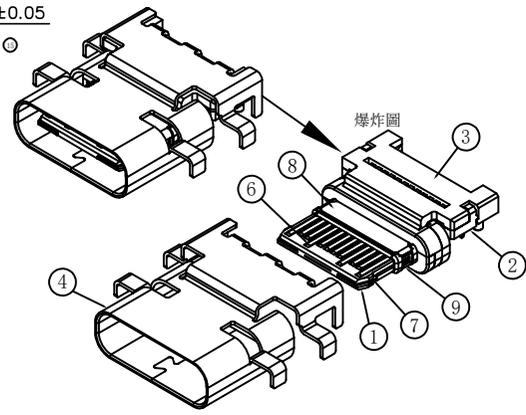


PIN	Signal Name	PIN	Signal Name
A1	GND	B12	GND
A2	SSTXp1	B11	SSRXp1
A3	SSTXn1	B10	SSRXn1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXn2	B3	SSTXn2
A11	SSRXp2	B2	SSTXp2
A12	GND	B1	GND

ITEM	PARTS NAME	Q'TY	MATERIAL	FINISH/REMARK
项目	零件名称	数量	材质	处理/备注
1	Insermold housing	1	SYNTHETIC RESIN	Black
2	12pin Insermold-(1)	1	SYNTHETIC RESIN	Black
3	12pin Insermold-(2)	1	SYNTHETIC RESIN	Black
4	SHELL	1	STAINLESS	Ni:50u" Min
5	12pin Contact-(DIP)	12	COPPER ALLOY	Gold flash on contact area 100u" Th on solder tails, base Nickel:50u"
6	12pin Contact-(SMT)	12	COPPER ALLOY	Gold flash on contact area 100u" Th on solder tails, base Nickel:50u"
7	Shield SHELL	1	STAINLESS	base Nickel:50u" Min Th:80u" Min Over All
8	Ground plate-top	1	STAINLESS	Ni:50u" Min
9	Ground plate-bottom	1	STAINLESS	Ni:50u" Min

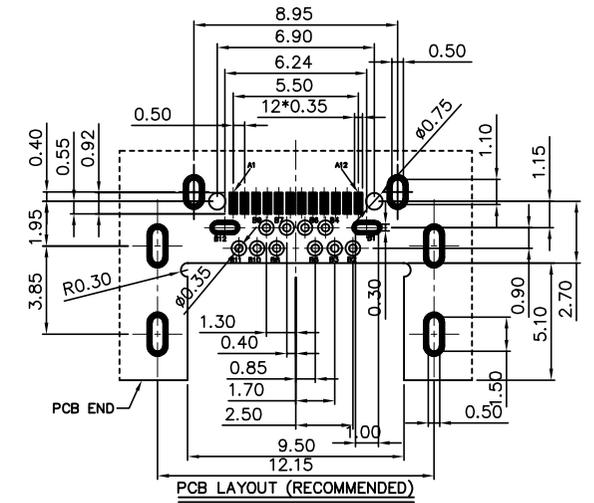

**SPECIFICATION**  
**MATERIAL**  
 See drawing  
**STANDARD DATA**  
 Rating current:1.5A  
**ELECTRICAL**  
 Insulator resistance: 100M ohms Min  
 Withstanding voltage: 100 VAC / minute  
 Contact resistance: 40 m ohms Max  
**MECHANICAL**  
 Mating force: 5~20N.  
 Unmating force: 8~20N.  
 Durability: 10000 cycles Min.  
**PART NO.**  
 D 1 3 -0824 - 24 001  
**SERIES**  
 D=I/O Connector  
**TYPE**  
 1=0.5mm pitch  
 3=SMT type  
**MODEL NO.**  
**TYPE NO.**  
 001=Type 01  
 CONTACT NUMBER  
 24=24position

产品图 PRODUCT CHART DWG		深圳市创勤科技有限公司 Shenzhen Chuangqin Technology Co., Ltd.			
公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	MM	制图 DRAWING	产品料号 PRODUCT PART NO.
X.	±0.25	X'.	±5'	审核 CHKD	CQ022-TFCB2400011
.X	±0.20	.X'	±2'	日期 DATE	产品名称 PRODUCT NAME
.XX	±0.15	.XX'	±1'	2016.05.17	角法 VIEW
.XXX	±0.10	.XXX'	±0.5'	核准 APPD	版本 VER
				核	A0