



REV.	ECN. NO.	APPD.

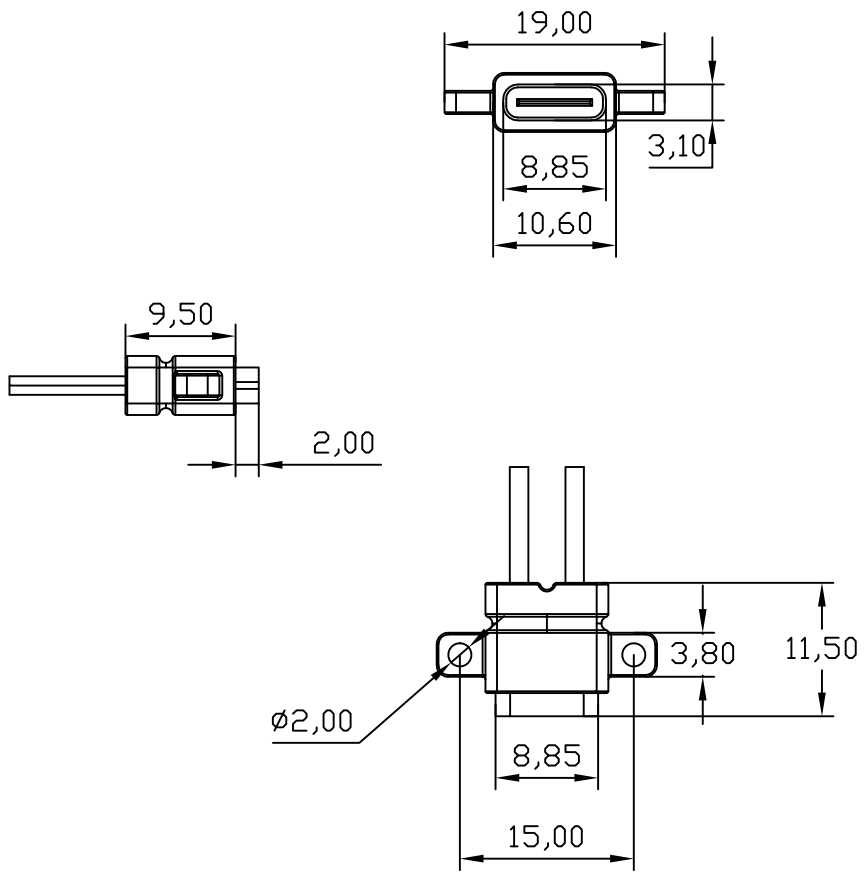

NOTES:

1.MATERIAL:
MOLDING: LCP UL94 V-0
CONTACT: COPPER ALLOY.
GOLD PLATED Min ON CONTACT AREA, 100u"
Min TIN (LEAD FREE) ON SOLDER AREA,
SHELL: SUS201-H,T=0.25±0.03mm
50u" NICKEL PLATING OVER ALL.

2.MECHANICAL:
INSERTION: 5~20N.
EXTRACTION: 8~20N AFTER TEST.
DURABILITY: 5000 CYCLES

3.ELECTRICAL:
CURRENT: 3A FOR VBUS;

VOLTAGE: 20 V MAX
WITHSTANDING VOLTAGE: 100V AC R.M.S.
CONTACT RESISTANCE: 40mΩ MAX.
INSULATION RESISTANCE: 100MΩ MIN.

4.ENVIRONMENTAL
TEMPERATURE RANGE -25°C ~ +85°C

5. 尺寸标注事项:
图示有标⊕ *者为首样全检, 重点管控尺寸,

6. 产品符合RoHS标准.

B12	GND
B9	VBUS
A9	VBUS
A12	GND
PIN	SIGNAL NAME

X. ±0.50	X.* ±2°	UNITS mm	深圳市创勤电子有限公司 SHENZHEN CHUANGQIN ELECTRONICS CO., LTD.	
.X ±0.30	.X.* ±1°		PART NO. CQ016-TFHX90211702	TITLE: TYPE-C2P防水座注塑带螺丝孔口款
.XX ±0.10	.XX.* ±0.5°	MAT'L /	APPD: ZHANG	DWG NO.: CQ016-TFHX90211702
.XXX ±0.05			CHKD: LIJY	DR: LINYUN 2022/02/02
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF CHUANGQIN ELECTRONIC TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF CHUANGQIN ELECTRONIC TECHNOLOGY CO., LTD		FINISH /		
		Q'TY /		