
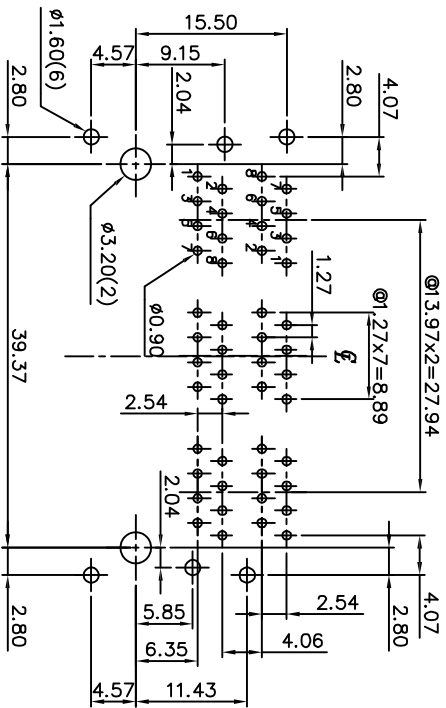
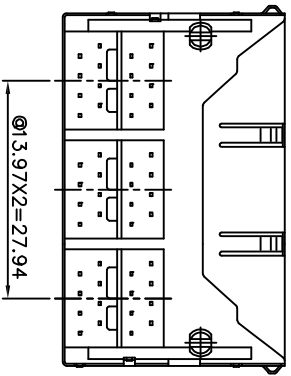
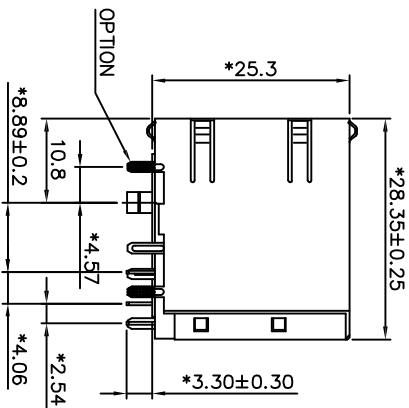


更改 REV	变更内容 MODIFICATION	日期 DATE	制图 DRAW	批准 APPROVE
A	图面发行	2012/10/29	JDL	Oscar

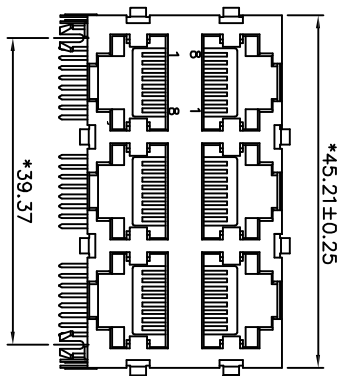

PC Board Layout Component Side Shown
Thickness=1.6mm

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 50 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.


MECHANICAL:

1. HOUSING & INSERT MATERIAL : GLASS FILLED POLYESTER UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE Ø0.46mm.
3. SHIELD MATERIAL : COPPER ALLOY, t=0.25mm.
4. PLATING : GOLD PLATING OVER NICKEL.
5. OPERATING LIFE : 750 CYCLES MIN.
6. PCB RETENTION PRE-SOLDER : 1 LB MIN.
7. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C.
 2. OPERATION: -40°C TO +85°C.
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.
CUL FILE NO. E163191

PART NUMBER: 59A-S2388A-E1XX

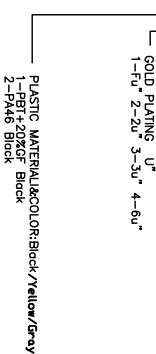

: Inspection Item		: Cp/Cpk and SPC Control Item	
DIMENSION IN mm [Inch]		TOLERANCE UNLESS OTHERWISE SPECIFIED	
.X±0.20	X°±1°	.XXX±0.15	X°±0.5°
.XXXX±0.075			
批准 APPROVE	检查 CHECK	制图 DRAW	审核 SCALE
Oscar		比例 SCALE	1:1
Oscar		图幅 SIZE	A3
Oscar		数量 QTY	1
Oscar		日期 DATE	1

深圳市创勤科技有限公司
Shenzhen Chuangqin Technology Co., Ltd.

文件号
FILE NO. DWG No. 59A-S2388A-E1

标题
TITLE 59A 2x3 BRPC PCB JACK&SHIELDED WITH EMI FINGER SIDE ENTRY ROUND PIN