
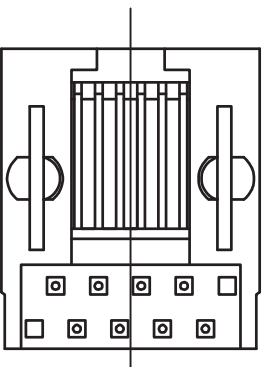
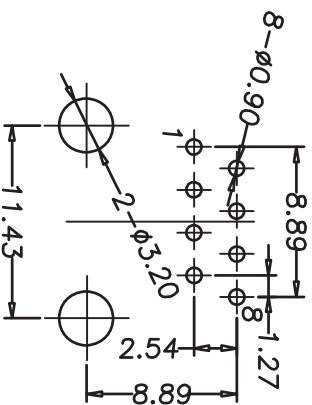
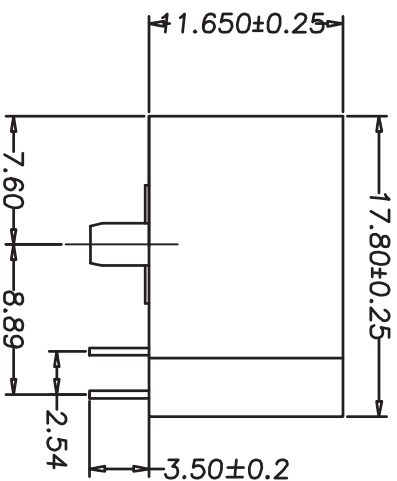


更改 REV	变更内容 MODIFICATION	日期 DATE	制图 DRAW	审核 APPROVE
A	版面发行	2012/10/29	JDL	Oscar

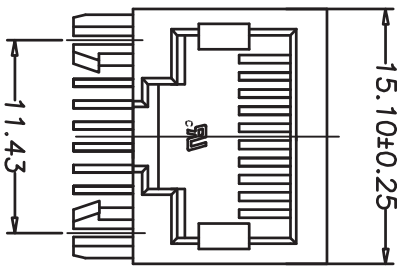

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 50 MILLIOHMS MAX.
- INSULATION RESISTANCE: 500 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 50HZ, 1MIN.

MECHANICAL:

- HOUSING MATERIAL : NYLON+30%G.F UL94V-0.
- CONTACT MATERIAL : PHOSPHOR BRONZE Ø0.46mm.
- PLATING : GOLD PLATING OVER NICKEL.
- SHIELD, COPPER ALLOY(OR STEEL ALLOY) 0.20mm THICKNESS PLATING NI.
- LED-OPTION
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB. MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.


ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C.
- OPERATION: 0°C TO +70°C.
- ROHS COMPLIANT

MATES WITH MODULAR PLUG CONFORMING TO

FCC PART 68, SUBPART F.

PART NUMBER: 58B-N1108-XX

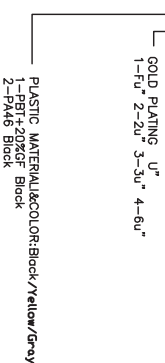

PC Board Layout

: Inspection Item		: Cp/Cpk and SPC Control Item	
DIMENSION IN mm [Inch]			
TOLERANCE UNLESS OTHERWISE SPECIFIED			
.X±0.20	X*±1*		
.XX±0.15	.X*±0.5*		
.XXX±0.075			
公差 APPROVE	检查 CHECK	制图 DRAW	审核 SCALE
Shenzhen Chuangqin Technology Co., Ltd.		Oscar	
深圳市创勤科技有限公司		1:1	
图号 FILE NO.	图号 DWG NO.	比例 SCALE	数量 REV
58B-N1108	58B-N1108	A3	1 / A
TITLE 58B 1X1 8P8C PCB JACK Low-Profile, UNSHIELDED, SIDE ENTRY, ROUND PIN			