
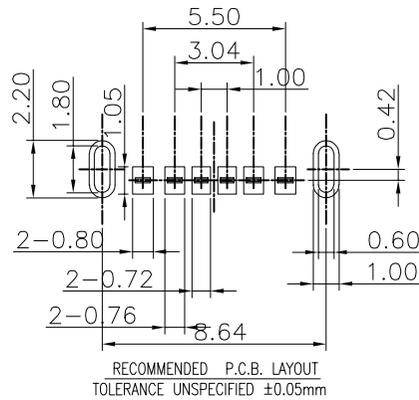
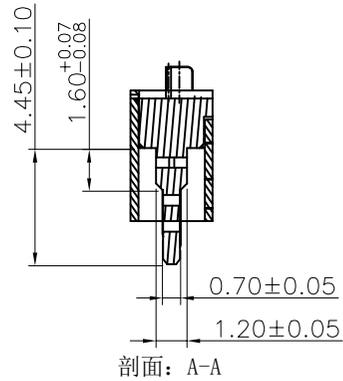


版本	发行说明	签名	日期
A	新发行	LIN YUN	2019.09.24



NOTES:

1.MATERIAL:

MOLDING: LCP UL94 V-0
 CONTACT: COPPER ALLOY.
 GOLD PLATED ON CONTACT AREA,
 30u" NICKEL PLATING OVER ALL.
 SHELL: STAINLESS STEEL, T=0.30±0.03mm
 30u" NICKEL PLATING OVER ALL.

2.MECHANICAL:

INSERTION: 5~20N.
 EXTRACTION: 8~20N AFTER TEST.






3.ELECTRICAL:

CURRENT: 3A FOR VBUS;
 1.25A FOR GND PIN.
 0.25A FOR OTHER.
 VOLTAGE: 20 V MAX
 WITHSTANDING VOLTAGE: 100V AC R.M.S.
 CONTACT RESISTANCE: 40mΩ MAX.
 INSULATION RESISTANCE: 100MΩ MIN.

4.ENVIRONMENTAL

TEMPERATURE RANGE -25°C ~ +85°C

5. 产品符合RoHS标准

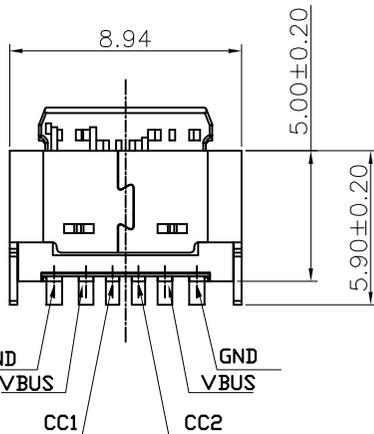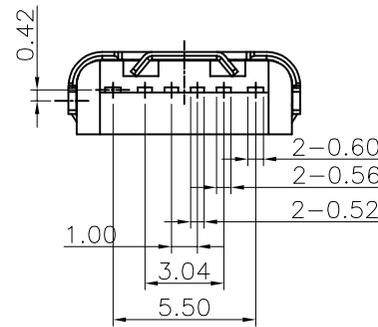

B12	GND
B9	VBUS
B5	CC2
A5	CC1
A9	VBUS
A12	GND
PIN	SIGNAL NAME

B12	GND	尺寸	允许公差
B9	VBUS	.X	±0.50
B5	CC2	.X	±0.20
A5	CC1	.XX	±0.15
A9	VBUS	.XXX	±0.10
A12	GND	.XXX	±0.10
PIN	SIGNAL NAME	角度	±1.00°

深圳市创勤科技有限公司
 SHENZHEN CHUANGQIN TECHNOLOGY CO., LTD.

图纸类型		图纸名称:	
产品工程图		6Pin-TYPE C-L5.0-立插	
设计	LIN YUN	2019.09.24	产品料号
审核	ZHANG	2019.09.24	视图
			版号: A

