

NOTES:


MATERIAL:
 1.HOUSING MATERIAL:GLASS FILLED POLYESTER(U94V-0).
 2.CONTACT MATERIAL :PHOSPHOR BRONZE #0.46mm (C51100).
 3.PLATING :GOLD PLATING OVER NICKEL.

ELECTRICAL:
 1.VOLTAGE RATING :125 VAC RMS.
 2.CURRENT RATING :1.5 AMP.
 3.CONTACT RESISTANCE :50 MILLIOHMS MAX.
 4.INSULATION RESISTANCE :500 MEGOHMS MIN @ 500V DC.
 5.DIELECTRIC WITHSTANDING RESISTANCE :1000V AC RMS 50Hz. 1MIN.

MECHANICAL:
 1.DURABILITY :750 CYCLES MIN.
 2.PCB RETENTION PRE-SOLDER :1 LB MIN.

ENVIRONMENTAL:
 1.STORAGE : -40°C TO +85°C.
 2. OPERATION : 0°C TO 70°C.

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68,SUBPART F.

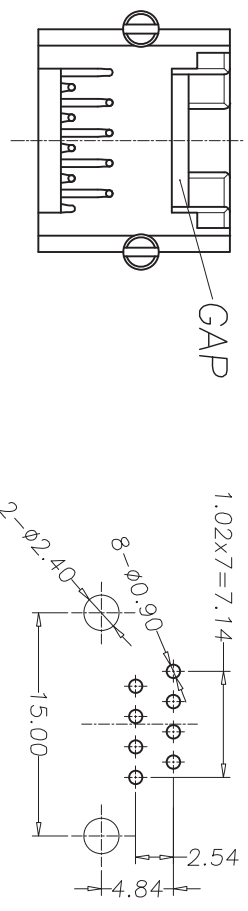

PCB LAYOUT
 TOLERANCES : ±0.05

GOLD PLATING: U"
 1-FU" 2-2U" 3-3U" 4-6U"

PLASTIC MATERIAL&COLOR:Black/Yellow/Gray
 1-PBT+20%GF Black
 2-PBT+20%GF Gray

PART NUMBER: 5521-N1188-XX

更改 REV	变更内容 MODIFICATION	日期 DATE	制图 DRAW	审核 APPROVE
A	版面发行	2012/10/29	JDL	Oscar

: Inspection Item		: Cp/Cpk and SPC Control Item	
DIMENSION IN mm [Inch]			
TOLERANCE UNLESS OTHERWISE SPECIFIED		X ± 1"	
.X ± 0.20	.X ± 0.15	.X ± 0.5"	
.XXXX ± 0.075			
批准 APPROVE	检查 CHECK	制图 DRAW	审核 CHECK
Shenzhen Chuangqin Technology Co., Ltd.		深圳市创勤科技有限公司	
图号 FILE NO.	图号 DWG NO.	5521-N1188	
标题 TITLE 5521 1X1 8P9C PCB JACK W/D SHIELD SIDE ENTRY, TAB-UP-ROUND PIN			
比例 SCALE	1:1	图框 SIZE	A3
版本 REV	1	数量 QTY	1
制图 DRAWN	Oscar	审核 CHECKED	A

