


Recommended P.C.B Layout(Top Side)

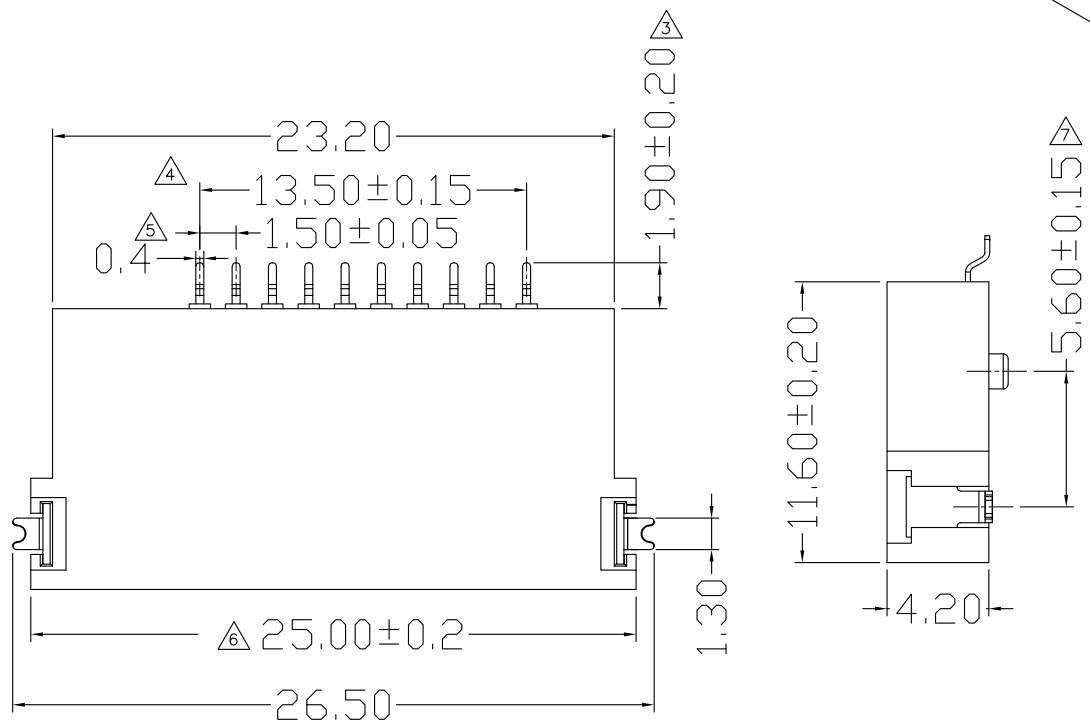

NOTES:
 Current Rating: 0.5A AC,DC
 Temperature Range: -20°C~+60°C
 Contact Resistance: 40mΩ max
 Insulation Resistance: 1000MΩ min
 Withstanding Voltage: 500V AC/minute
 Material: LCP UL 94V-0

UNITS mm		NAME(INTENDED USE)	深圳市创勤电子有限公司 SHENZHEN CHUANGQIN ELECTRONICS CO.,LTD.								
MAT'L NONE		PART NO.(INTENDED USE)	TITLE: CQ110-MSQS00192115								
.X± 0.25		.X°± 1°	APPD: ZHANG	DWG NO.:							
.XX± 0.15		.XX°± 0.2°	CHKD: LIJY								
.XXX± 0.08		.XXX°± 0.05°	DR: LINYUN								
.XXX± 0.05		.XXX°± 0.01°			<table border="1"> <tr> <td>SCALE</td> <td>SHEET</td> <td>REV.</td> </tr> <tr> <td>1:1</td> <td>1/1</td> <td>A</td> </tr> </table>	SCALE	SHEET	REV.	1:1	1/1	A
SCALE	SHEET	REV.									
1:1	1/1	A									