


REV	变更内容 MODIFICATION	日期 DATE	制图 DRAW	审核 APPROVE
A	版面发行	2012/10/29	JDL	Oscar

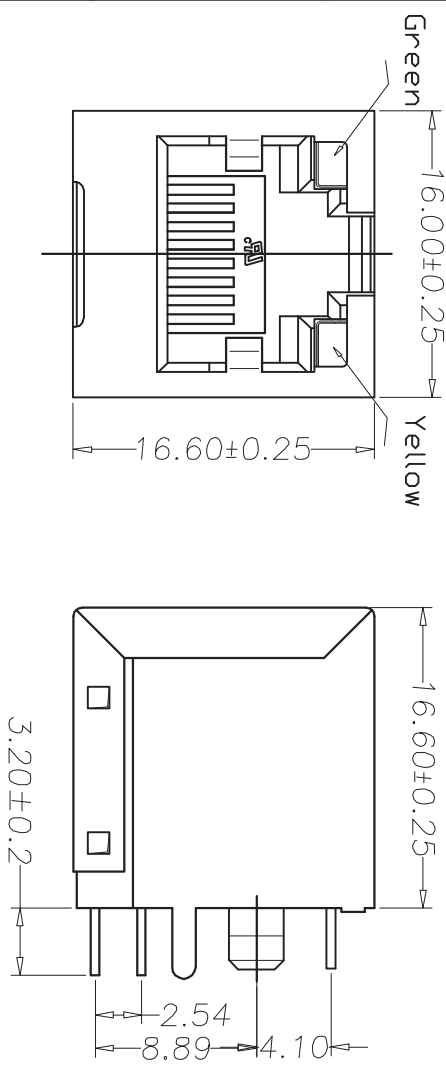

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP
- CONTACT RESISTANCE : 50 MILLIOHMS MAX.
- INSULATION RESISTANCE: 500 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 50HZ, 1MIN.



MECHANICAL:

- HOUSING MATERIAL : GLASS FILLED POLYESTER UL94V-0
- CONTACT MATERIAL : PHOSPHOR BRONZE Ø0.46mm.
- PLATING : GOLD PLATING OVER NICKEL.
- SHIELD : COPPER ALLOY(OR STEEL ALLOY) 0.20mm THICKNESS PLATING NI.
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C.
- OPERATION: -40°C TO +85°C.
- ROHS COMPLIANT

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

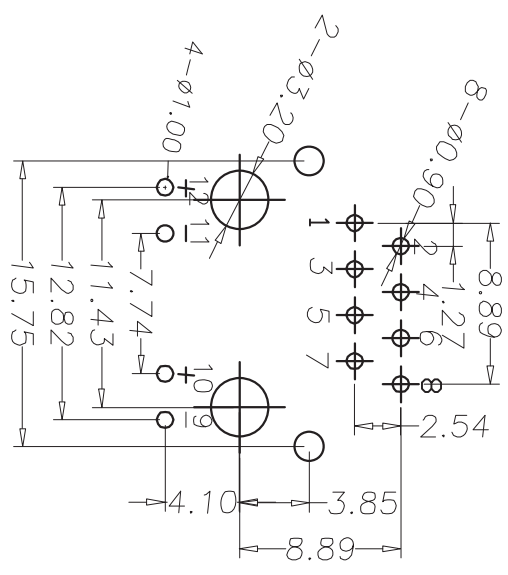

PART NUMBER: 52A-S1108L2-XX

- GOLD PLATING "U"  
1-FU" 2-2U" 3-3U" 4-6U"
- PLASTIC MATERIAL:COLOR:Black/Yellow/Grey  
1-PR1+2IGF Block  
2-PA46 Block

PC Board Layout



: Inspection Item		: Cp/Cpk and SPC Control Item	
DIMENSION IN mm [Inch]			
TOLERANCE UNLESS OTHERWISE SPECIFIED		X.± 1"	
.X± 0.20	.X.± 0.15	.X.± 0.5"	
.XXX± 0.075			
检验 APPROVE	标准 CHECK	制图 DRAW	审核 SCALE
Shenzhen Chuangqin Technology Co., Ltd.		Oscar	
深圳市创勤科技有限公司		1:1	
图号 FILE NO.	图号 DWG NO.	比例 SCALE	图框 SIZE
52A-S1108L2	52A-S1108L2	A3	A
52A 1X1 8P8C LED PCB JACK WITH SHIELDED TOP ENTRY,ROUND PIN		数量 QTY	版本 REV
		1	1