



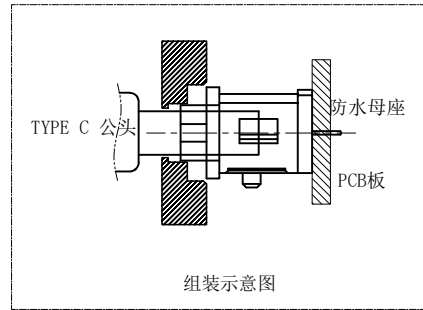


RoHS

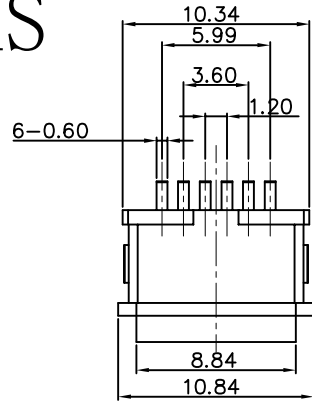

RECOMMENDED PCB LAYOUT(TOP VIEW)


THICKNESS T=1.0mm
DEFAULT TOLERANCE+/-0.05

NOTES:

SPECIFICATION:

- CURRENT RATING: 3.0A MAX
- DIELECTRIC WITHSTAND VOLTAGE: 100VAC
- TEMPERATURE RANGE: -30 °C ~ 85 °C
- CONTACT RESISTANCE: 40 MILLIONHM MAX
- INSULATION RESISTANCE: 100 MEGOHMS MIN.
- INSERTION FORCE : 5N~20N
- UNMATING FORCE: 8N~20N
- DURABILITY:5000 CYCLES

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

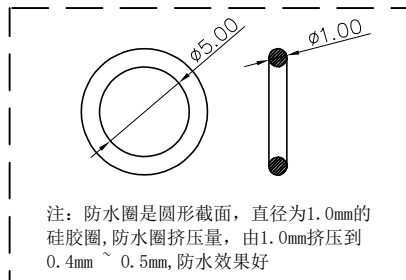

4	Shell1	1	SUS301 Ni Plating T=0.25mm	Ni:40~120u";
3	Housing2	1	LCP(G.F30%)	
2	Contact	5	Phosphor bronze C5210R-EH Au/Ni Plating T=0.20mm	Ni:40~160u"; Au:CONTACT AREA:3u", OTHER AREA:G/F
1	Housing	1	PA9T (G.F30%)	
ITEM	PART NAME	Q' TY	FINISH	NOTE

UNITS mm	SCALE 1:1	REV.	SHEET 1 OF 1	深圳市创勤科技有限公司 SHENZHEN CHUANGQIN TECHNOLOGY CO.,LTD.		
		DATE 2017.04.15	TITLE TYPE-C母座6P直插无脚带柱防水			
		DR. LIN YUN	MAT'L SEE TABLE		FINISH SEE TABLE	
GENERAL TOLERANCE X. ±0.50 X.X ±0.30 X.XX ±0.10 X.XXX ±0.05 X.X' ±1' X.XX' ±0.5'		CHK. LI JY	DWG.NO. CQ026-TFFS0604002	A	PART NO. SEE TABLE	SIZE A4
		APPD. ZHANG				