
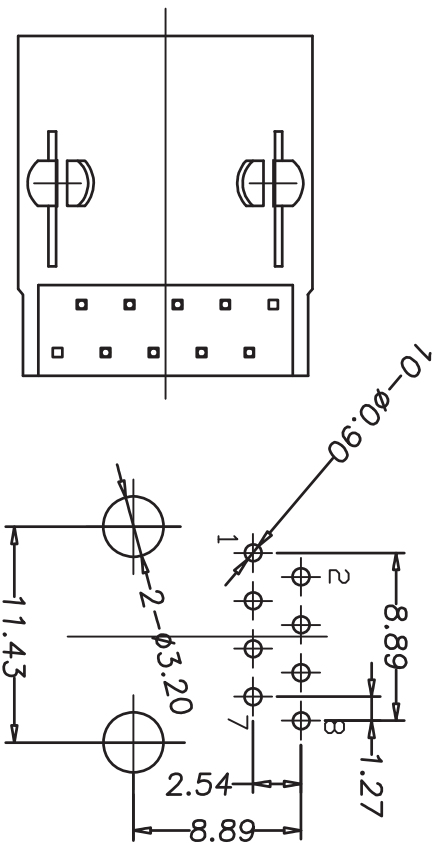


更改 REV	变更内容 MODIFICATION	日期 DATE	制图 DRAW	审核 APPROVE
A	版面发行	2012/10/29	JDL	Oscar

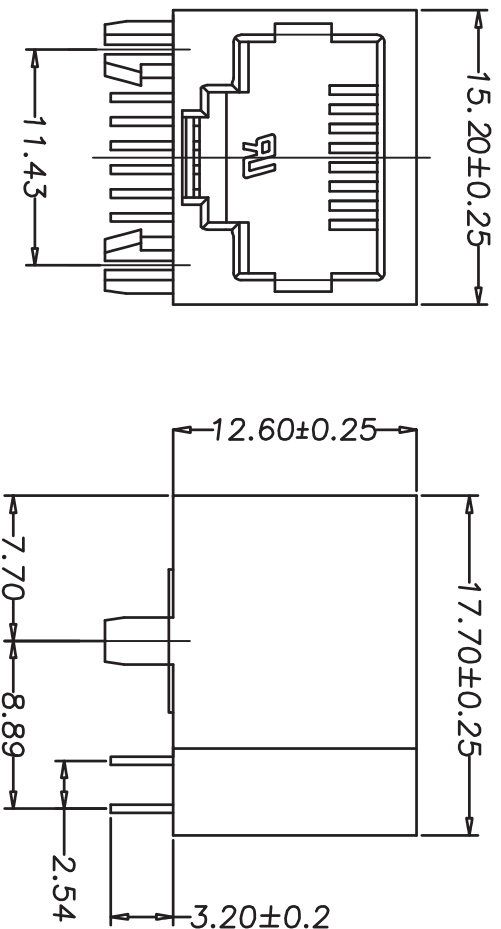

PC Board Layout

- NOTES:
- ELECTRICAL:**
- VOLTAGE RATING : 125 VAC RMS.
 - CURRENT RATING : 1.5 AMP.
 - CONTACT RESISTANCE : 50 MILLIOHMS MAX.
 - INSULATION RESISTANCE: 500 MEGOHMS MIN @ 500 VDC.
 - DIELECTRIC STRENGTH : 1000 VAC RMS 50Hz, 1MIN.
- MECHANICAL:**
- HOUSING MATERIAL : NYLON+30%G.F UL94V-0.
 - CONTACT MATERIAL : PHOSPHOR BRONZE ϕ 0.46mm.
 - PLATING : GOLD PLATING OVER NICKEL.
 - SHIELD COPPER ALLOY(OR STEEL ALLOY) 0.20mm THICKNESS PLATING NI.
 - LED-OPTION
 - OPERATING LIFE : 750 CYCLES MIN.
 - PCB RETENTION PRE-SOLDER : 1 LB MIN.
 - PCB RETENTION POST-SOLDER: 10 LBS MIN.
- ENVIRONMENTAL:**
- STORAGE : -40°C TO +85°C.
 - OPERATION: 0°C TO +70°C.
 - WAVE SOLDERING TEMPERATURE: 255~265° (5~10SECONDS).
 - ROHS COMPLIANT
 - MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

PART NUMBER: 58A-N1108A-XX

GOLD PLATING "U"
1-Fu" 2-2U" 3-3U" 4-6U"
PLASTIC MATERIAL:COLOR:Black/Yellow/Gray
2-Fu" 4-Block

Shenzhen Chuangqin Technology Co., Ltd.		深圳市创勤科技有限公司	
DIMENSION IN mm [Inch]		图号 FILE NO.	58A-N1108A
TOLERANCE UNLESS OTHERWISE SPECIFIED		图号 DWG NO.	
.X±0.20	X*±1"	标题 TITLE	
.XX±0.15	.X*±0.5"	58A 1X1 8P8C PCB JACK W/D SHIELD	
.XXX±0.075		SIDE ENTRY/ROUND PIN	
批准 APPROVE	检查 CHECK	制图 DRAW	审核 REV
:Inspection Item		Oscar	1
:Cp/Cpk and SPC Control Item		比例 SCALE	1:1
		图框 SIZE	A3
		版本 REV	A