

REV.	MODIFICATION	BY No.	NAME	DATE
A0	新版发行			2017-02-24

- NOTES:
- MATERIAL:
 - MOLDING: LCP UL94 V-0
 - CONTACT: COPPER ALLOY.
 - GOLD PLATED Min ON CONTACT AREA, 100u"
 - Min TIN (LEAD FREE) ON SOLDER AREA,
 - SHELL: SUS304-H,T=0.30±0.03mm
 - 50u" NICKEL PLATING OVER ALL.
 - MECHANICAL:
 - INSERTION: 5~20N.
 - EXTRACTION: 8~20N AFTER TEST.
 - DURABILITY: 10000 CYCLES
 - ELECTRICAL:
 - CURRENT: 3A FOR VBUS;
 - 1.25A FOR GND PIN.
 - 0.25A FOR OTHER.**
 - VOLTAGE: 20 V MAX
 - WITHSTANDING VOLTAGE: 100V AC R.M.S.
 - CONTACT RESISTANCE: 40mΩ MAX.
 - INSULATION RESISTANCE: 100MΩ MIN.
 - ENVIRONMENTAL
 - TEMPERATURE RANGE -25°C ~ +85°C
 - 尺寸标注事项:
 - 图示有标示"⊗"为首样全检, 重点管控尺寸.
 - 产品符合RoHS标准.

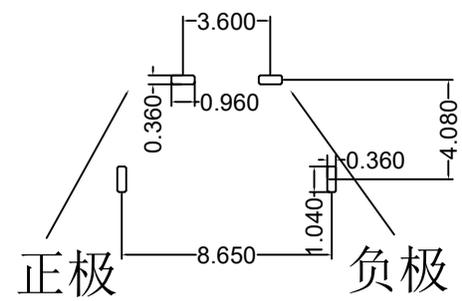
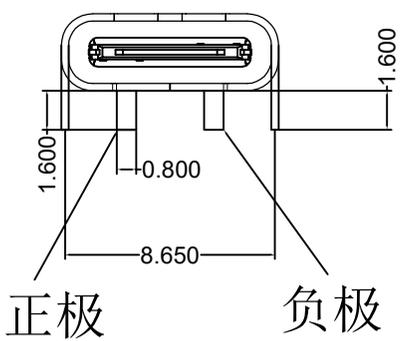

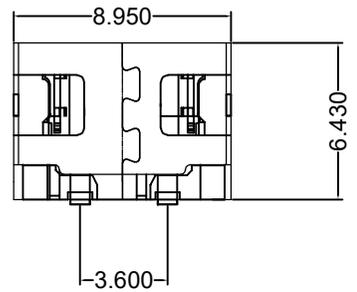


Table:

成品料号	零件名称	零件料号	材料 / 电镀
TX	端子	TX	SUS 304 RH NO PLATING
	塑胶材料	TX	SUS 301 RH Sn 80~200u"
	外壳	TX	SUS 301 RH 电镀切料带后.

深圳市创勤科技有限公司
SHENZHEN CHUANGQIN TECHNOLOGY CO., LTD.

.X: ±0.35	.X': ±1.5'	INTENDED USE: CONNECTOR	TITLE: TYPE-C 2P 90度母座	
.XX: ±0.25	.XX': ±1.0'		APPD.: ZHANG	PART NO.: SEE TABLE
.XXX: ±0.20	.XXX': ±0.5'	CHKD.: LI JY	DWG. NO.: CQ016-TFBS0264310	PAGE: 1/1
MAT'L : SEE NOTES	⊗	DR.: LIN YUN	SCALE: 1:1	REV.: A0
FINISH:			UNIT: mm	