



REV.	MODIFICATION	ECN No.	NAME	DATE
A0	新版发行		LIN YUN	2017-02-24

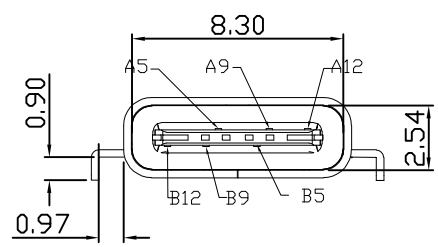

B12	GND
B9	VBUS
B5	CC2
A5	CC1
A9	VBUS
A12	GND
PIN	SIGNAL NAME

- NOTES:
- MATERIAL:
    - MOLDING: LCP UL94 V-0
    - CONTACT: COPPER ALLOY.
    - GOLD PLATED Min ON CONTACT AREA, 100u"
    - Min TIN (LEAD FREE) ON SOLDER AREA,
    - SHELL: SUS304-H, T=0.30±0.03mm
    - 50u" NICKEL PLATING OVER ALL.
  - MECHANICAL:
    - INSERTION: 5~20N.
    - EXTRACTION: 8~20N AFTER TEST.
    - DURABILITY: 10000 CYCLES
  - ELECTRICAL:
    - CURRENT: 5A FOR VBUS;
    - 1.25A FOR GND PIN.
    - 0.25A FOR OTHER.
    - VOLTAGE: 20 V MAX
    - WITHSTANDING VOLTAGE: 100V AC R.M.S.
    - CONTACT RESISTANCE: 40mΩ MAX.
    - INSULATION RESISTANCE: 100MΩ MIN.
  - ENVIRONMENTAL
    - TEMPERATURE RANGE -25°C ~ +85°C
  - 尺寸标注事项:
    - 图示有标⊗者为首样全检, 重点管控尺寸.
  - 产品符合RoHS标准

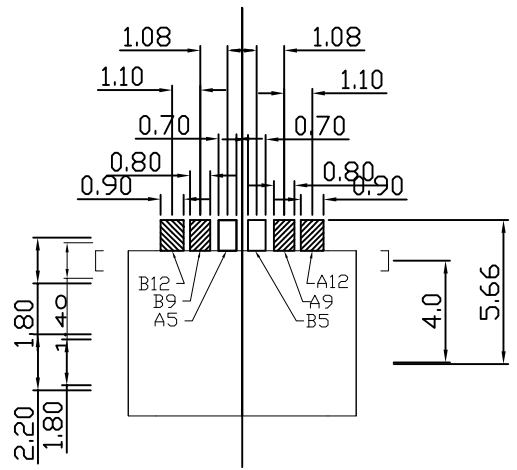
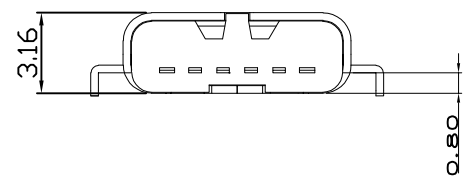

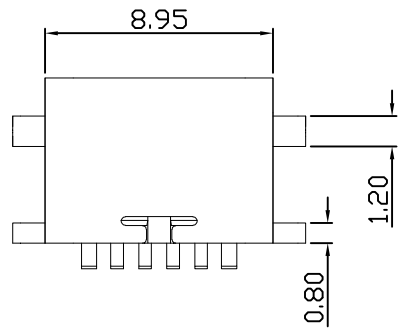


Table:

成品料号	零件名称	零件料号	材料 / 电镀
TX	molding半成品 端子	TX	SUS 304 R-H NO PLATING
	材料 接触件	TX	SUS 301 R-H Sn 80~200u"
	外壳	TX	SUS 301 R-H 电镀切料带后.

深圳市创勤科技有限公司  
SHENZHEN CHUANGQIN TECHNOLOGY CO., LTD.

.X: ±0.35	.X': ±1.5'	INTENDED USE:	TITLE:
.XX: ±0.25	.XX': ±1.0'	CONNECTOR	USB TYPE C 6PIN沉板
.XXX: ±0.20	.XXX': ±0.5'	APPD.: ZHANG	PART NO.: SEE TABLE
MAT'L.: SEE NOTES		CHKD.: LI JY	DWG. NO.: CQ016-TFCB0600801
FINISH:		DR.: LIN YUN	SCALE: 1:1 PAGE: 1/1
			UNIT: mm REV.: A0