



更改内容 REV	修改内容 MODIFICATION	日期 DATE	制图 DRAW	审核 APPROVE
A	版面发行	2012/10/29	JDL	Oscar

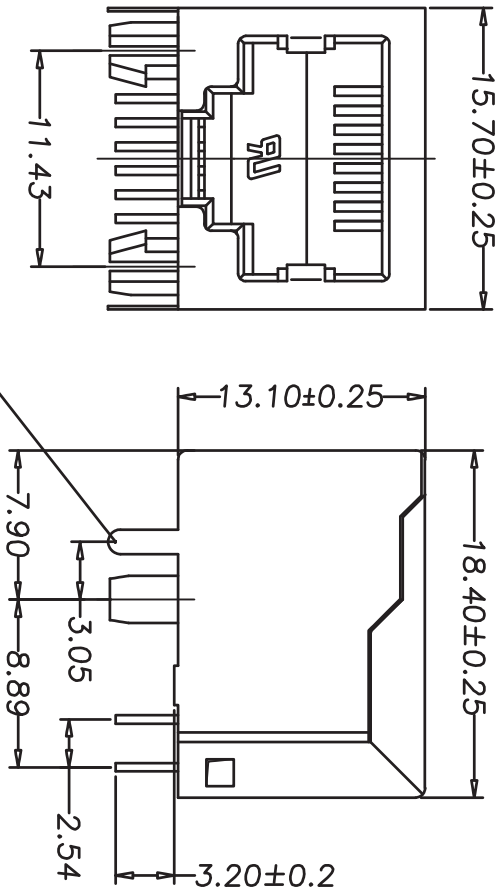

PEG/TAB

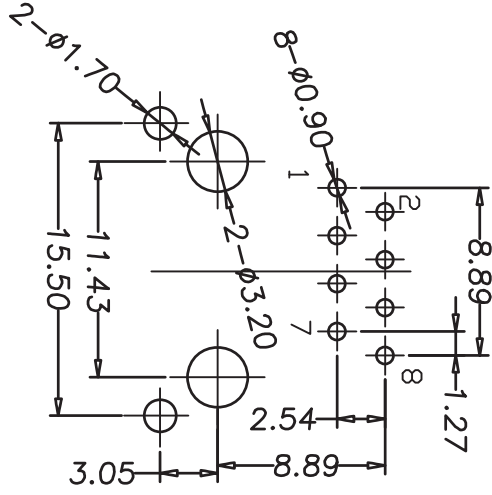


PC Board Layout

- NOTES:
- ELECTRICAL:**
- VOLTAGE RATING : 125 VAC RMS.
 - CURRENT RATING : 1.5 AMP.
 - CONTACT RESISTANCE : 50 MILLIOHMS MAX.
 - INSULATION RESISTANCE : 500 MEGOHMS MIN @ 500 VDC.
 - DIELECTRIC STRENGTH : 1000 VAC RMS 50HZ, 1MIN.
- MECHANICAL:**
- HOUSING MATERIAL : NYLON+30%G.F UL94V-0.
 - CONTACT MATERIAL : PHOSPHOR BRONZE Ø0.46mm.
 - PLATING : GOLD PLATING OVER NICKEL.
 - SHIELD COPPER ALLOY(OR STEEL ALLOY) 0.20mm THICKNESS PLATING NI.
 - LED-OPTION
 - OPERATING LIFE : 750 CYCLES MIN.
 - PCB RETENTION PRE-SOLDER : 1 LB MIN.
 - PCB RETENTION POST-SOLDER: 10 LBS MIN.

- ENVIRONMENTAL:**
- STORAGE : -40°C TO +85°C.
 - OPERATION: 0°C TO +70°C.
 - WAVE SOLDERING TEMPERATURE: 255~265° (5~10SECONDS).
 - ROHS COMPLIANT
 - MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

PART NUMBER: 58A-S1108C-XX

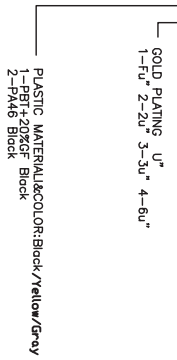

: Inspection Item		: Cp/Cpk and SPC Control Item	
DIMENSION IN mm [Inch]			
TOLERANCE UNLESS OTHERWISE SPECIFIED		X ± 1"	
.X ± 0.20		.X ± 0.5"	
.XX ± 0.15			
.XXX ± 0.075		检查 CHECK	
: APPROVE		: APPROVE	
Shenzhen Chuangqin Technology Co., Ltd.		深圳市创勤科技有限公司	
图号 FILE NO.	图号 DWG NO.	审核 DRAW	制图 OSCAR
58A-S1108C		58A 1X1 8P8C PCB JACK WITH SHIELDED SIDE ENTRY ROUND PIN	
比例 SCALE	图框 SIZE	审核 REV	制图 REV
1:1	A3	1	1

