

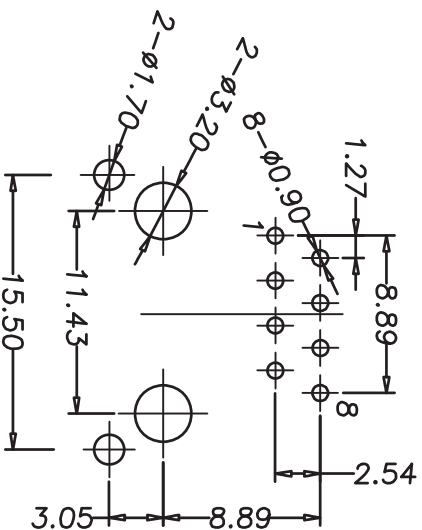
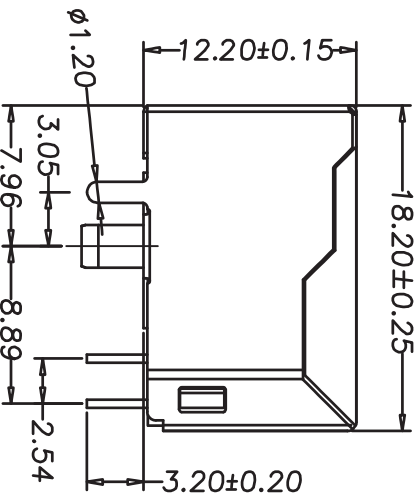


更改 REV	变更内容 MODIFICATION	日期 DATE	制图 DRAW	审核 APPROVE
A	版面发行	2012/10/29	JDL	Oscar

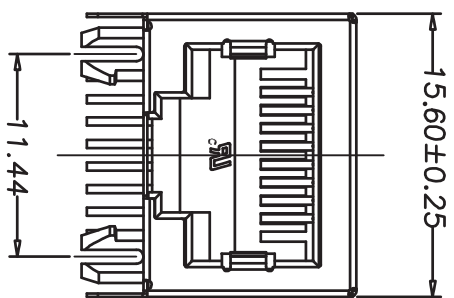

PC Board Layout

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 50 MILLIOHMS MAX.
- INSULATION RESISTANCE: 500 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 50HZ, 1MIN.


MECHANICAL:

- HOUSING MATERIAL : NYLON+30%G.F UL94V-0.
- CONTACT MATERIAL : PHOSPHOR BRONZE  $\phi$ 0.46mm.
- PLATING : GOLD PLATING OVER NICKEL.
- SHIELD COPPER ALLOY(OR STEEL ALLOY) 0.20mm THICKNESS PLATING NI.
- LED-OPTION
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C.
- OPERATION: 0°C TO +70°C.
- WAVE SOLDERING TEMPERATURE: 255°~265° (5~10SECONDS).
- ROHS COMPLIANT
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

PART NUMBER: 58B-S1108C-XX

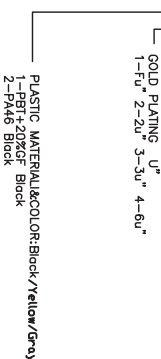

:Inspection Item		:Cp/Cpk and SPC Control Item		Shenzhen Chuangqin Technology Co., Ltd.	
DIMENSION IN mm [Inch]		TOLERANCE UNLESS OTHERWISE SPECIFIED		深圳市创勤科技有限公司	
.X±0.20	X*±1*	图号 FILE NO.	图号 DWG NO.	58B-S1108C	
.XX±0.15	.X*±0.5*	标题 TITLE 58B 1X1 8P8C PCB JACK Low-Profile, WITH SHIELDED ,SIDE ENTRY,ROUND PIN			
.XXX±0.075		制图 DRAW	审核 CHECK	Oscar	
批准 APPROVE	检查 CHECK	比例 SCALE	图框 SIZE	数量 QTY	版本 REV
		1:1	A3	1	A