

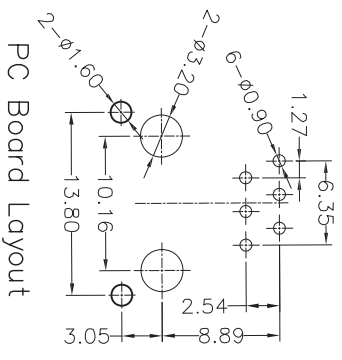


更改 REV	变更内容 MODIFICATION	日期 DATE	制图 DRAW	批准 APPROVE
A	版面发行	2012/10/29	JDL	Oscar



PC Board Layout

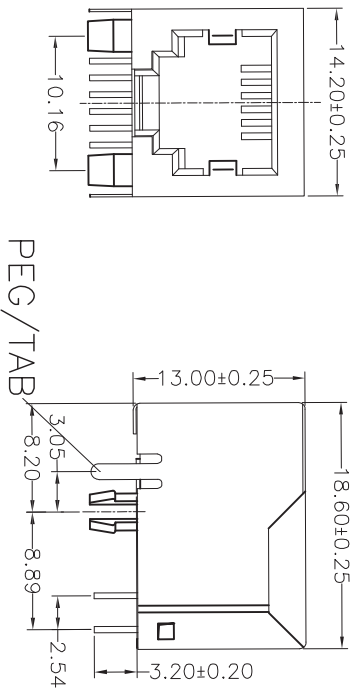

- NOTES:
- MATERIAL:
- 1.HOUSING MATERIAL :GLASS FILLED POLYESTER(U94W-0).
  - 2.CONTACT MATERIAL :PHOSPHOR BRONZE T=0.35mm.
  - 3.PLATING :GOLD PLATING OVER NICKEL.
  - 4.SHIELD COPPER ALLOY 0.20mm THICKNESS PLATING NI.
- ELECTRICAL:
- 1.VOLTAGE RATING :125 VAC RMS.
  - 2.CURRENT RATING :1.5 AMP.
  - 3.CONTACT RESISTANCE :50 MILLIOHMS MAX.
  - 4.INSULATION RESISTANCE :500 MEGOHMS MIN @ 500V DC.
  - 5.DIELECTRIC WITHSTANDING RESISTANCE :1000V AC RMS 50HZ, 1MIN.
- MECHANICAL:
- 1.DURABILITY :750 CYCLES MIN.
  - 2.PCB RETENTION PRE-SOLDER :1 LB MIN.
- ENVIRONMENTAL:
- 1.STORAGE :-40°C TO +85°C.
  - 2.OPERATION : 0°C TO 70°C.
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68,SUBPART F.

PART NUMBER: 58A-S1166C-XX

- 1-GOLD PLATING "U"
- 1-FU" 2-2U" 3-3U" 4-6U"
- PLASTIC MATERIAL&COLOR:Black/Yellow/Gray
- 1-PCB: 20X25" Black
- 2-PA46 Black

: Inspection Item		: Cp/Cpk and SPC Control Item	
DIMENSION IN mm [Inch]			
TOLERANCE UNLESS OTHERWISE SPECIFIED		X* ± 1"	
.X ± 0.20	.X* ± 0.5"	批准	检查
.XXX ± 0.15		批准	
.XXX ± 0.075		批准	
Shenzhen Chuangqin Technology Co., Ltd.		深圳市创勤科技有限公司	
图号 FILE NO.	图号 DWG NO.	制图 DRAW	审核 SCALE
58A-S1166C	58A-S1166C	Oscar	1:1
TITLE 58A 1X1 6P6C PCB JACK WITH SHIELDED SIDE ENTRY,ROUND PIN		比例 SCALE	图框 SIZE
		1:1	A3
		1	1